


- ZoneControl® CR: Dual Speed Adjustable Compression (C) with adjustable JCO: Provides superior bottom out control through a 2-stage, telescoping internal compression stop. This feature eliminates the need for an external hydraulic bump stop and can be tailored to your individual preferences
- Rebound (R): Secondary rebound stop will dissipate spring energy and stabilize the suspension directly following a large compression event. The internal rebound stop will also eliminate harsh top-out events and the need for an external limit strap
- Triple piston design delivers comfort during every day driving conditions and maximum control under large suspension inputs
- Click adjuster knobs allow easy and precise Dual Speed Adjustment of both low and high-speed compression plus an adjustable JCO (internal hydraulic bump stop)
- Aluminum finned 60mm ID reservoir for increased oil capacity and cooling
- Aerospace quality components are vehicle specific to optimize wheel travel and clearance
- All aluminum design with Type III Hard Anodized finish
- Owner rebuildable and revalvable
- Made in the USA
- Limited 2-year warranty



# **B8 8112 BLACK HAWK COILOVER FEATURES:**

- Coilover supplied as a complete module for easy installation.
  Spring is pre-loaded to the recommended ride height
- Adjustable threaded spring seat allows for fine-tuned ride height.
  Adjustable range 1-3" depending on model
- Heavy duty, hard chrome heim joint mounting with rubber sealed misalignment spacers offer the most durable, load bearing mount solution

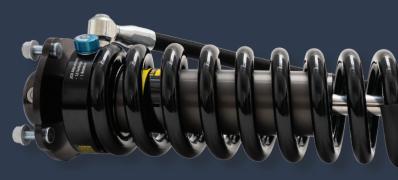



## **B8 8100 BLACK HAWK SHOCK FEATURES:**

- Integrated debris shield protects piston rod from rock damage
- OE quality vulcanized bushings for durable direct fit mounting

### **TOYOTA TUNDRA APPLICATIONS**

#### **FULL RANGE AVAILABLE**

Model	Lifted Height			Front	Front Shock / Kit		Rear Shock / Kit		
	Year	Front	Rear	Part # (L/R)	Series	Note	Part # (L/R)	Series	Note
ТОҮОТА									
4WD Pickups									
Tundra	'22-'25	0"	0"	24-329156	4600	8	24-329163	4600	8
		0-2.3"	0-1"	24-329200	5100 RHA	8	24-329217	5100	8
		0-2.3"	0-1"	24-329200	5100 RHA	8	24-332903	5100	8, 14
		0-2.2"	0-1"	47-329232	6112	8	24-329248	6100	8
		0-2.2"	0-1"	47-329232	6112	8	24-332958	6100	8, 14
NEW		1-2.25"	0-1"	41-332245 / 41-332238	8112 Black Hawk	4, 8	25-332315 / 25-352016	8100 Black Hawk	8
		-	1"	-	-		53-332356	B12 Special (Coil Spring)	8
		-	1"	-	-		53-329257	B12 Special (Coil Spring Pair)	8, 14

#### Footnotes

- 4 = Aftermarket upper control arms required
- 8 = Without X-REAS, Adaptive Variable Suspension (AVS), or rear air suspension
- 14 = Heavy Load Option recommended for 500 lb constant rear weight



